

AB-E-N319




eCLIQ Grade 4 Padlock

- Power supplied via key
- Steel case hardened
- 11.1mm steel shackle, hardened and chrome plated
- DIN EN 16864 class 4 as standard
- With dust and rain cap as standard (IP67)
- Available with shackle lengths 27mm(25), 50mm, 75mm
- Optionally available with high shoulders (25HS)
- Temperature range from -25°C to +85°C
- Maintenance-free for up to 200,000 cycles
- Optionally available with ATEX approval for use in potentially explosive atmospheres in Zone 1 – II 2G EX IB IIB T4 Gb

Scope of delivery:

- Padlock with protection cap

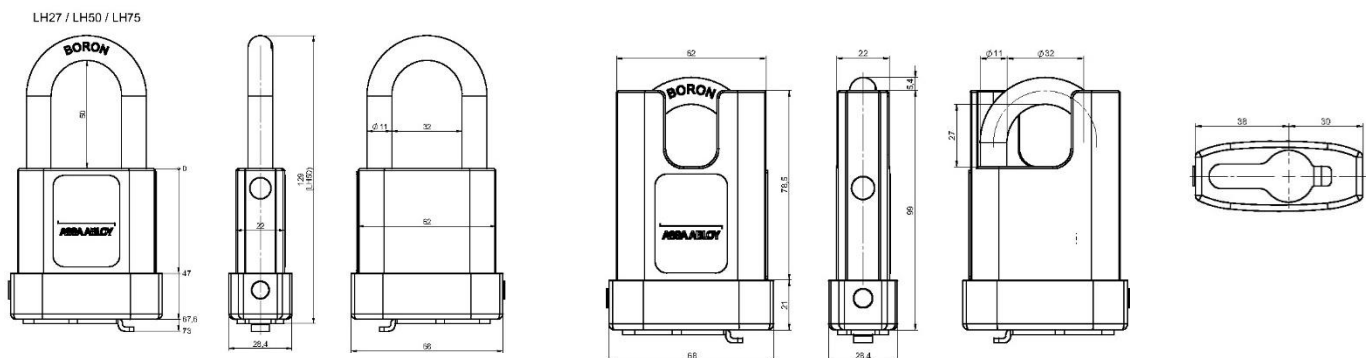

Ordering codes:

Item number	Shackle Height		Optional Extras	
AB-E-N319	-25	27mm Shackle height	-AT	ATEX approved
	-50	50mm Shackle height		
	-75	75mm Shackle height		
	-25S	27mm Shackle height with Shoulders		

Example part codes:

AB-E-N319-50 = eCLIQ Grade 4 Padlock with 50mm shackle

AB-E-N319-25S-AT = eCLIQ Grade 4 Padlock with 27mm shackle and high shoulders with ATEX approval.