
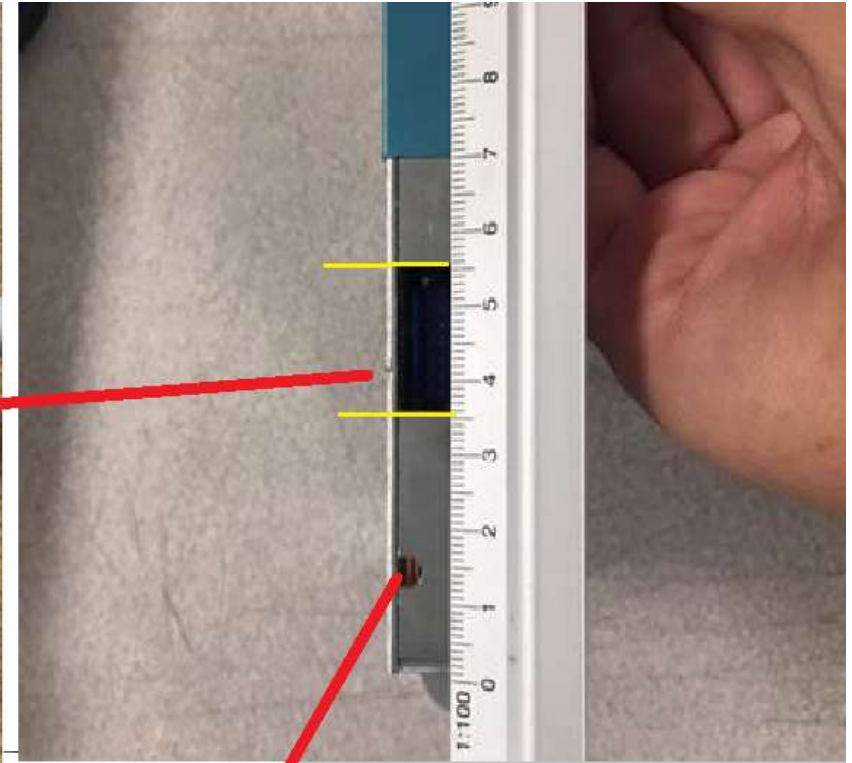


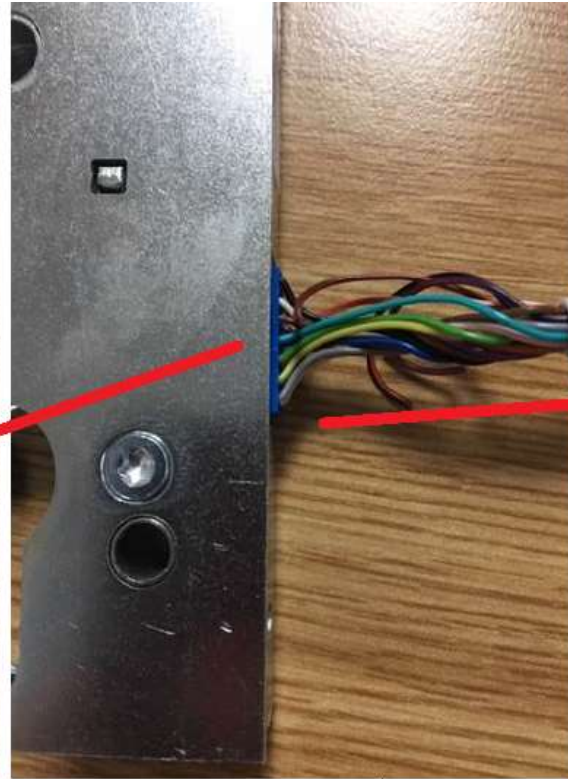

Please see attached photos showing the position of the cable connector on the back of an EL560.

As you can see it is between 35mm & 55mm from the bottom of the lock body.

Also shown is an example of how we would install the cable behind the lockcase.

The cable tie provided with the lock is placed through the holes and the first part of the cable coming out of the lock is held securely preventing the cable being pulled out of the lock. The cable is then looped up behind the lock allowing for the lock to be taken back out of the mortice if required.

