

StrongBOLT

220V

Oval profile cylinder Sashlock





Application:

- For timber doors hinged on the left or right
- Suitable for doors up to 54mm thick
- For use with an Oval profile cylinder

Specification:

New features

- **Easily reversible radius latch** that uses the unique UNION **SwitchLatch** technology, **No tools are needed**, it's **Time saving** and **Simple**
- **Anti rattle adjustable strike** for on site fine tuning
- Radius plastic **splinter guard** for easy installation and a professional finish
- Anti-saw security features for resistance against attack
- Chamfered bolt design increases the performance of the lock under side load testing. The chamfer of the bolt also makes drilling attack more difficult
- Radius inner forend for ease of installation
- Deadbolt locked or unlocked by the cylinder key or turn
- 12.5mm deadbolt for secure positive deadlocking
- Can be installed in the many UK mortices without the need for additional carpentry or spoiling the edge of the door
- Hardened steel pins provide resistance to attack from sawing
- Case Size: 68mm (2.5") or 81mm (3")
- Backset: 45mm or 57mm
- Case: Steel, red powder coat
- Forend: Stainless steel or brass plated
- Striking Plate: Finished to match forend
- Faceplate: Supplied with square faceplate which covers a radius inner forend
- Deadbolt: Zinc with hardened steel rollers
- Latch Bolt: Zinc
- Follower: Sintered Steel
- Rebate Kit: 2200REB 13mm (0.5")
- Suitable for use on 30 and 60 min fire doors
- Packaging: Individually boxed

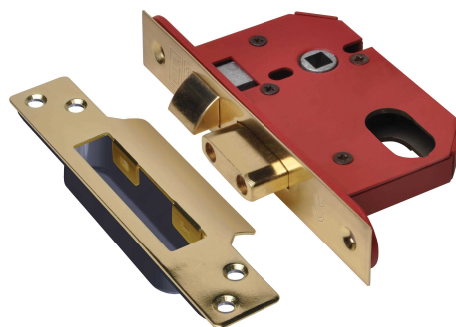

Standards:

- Tested to BS EN 12209:2003
- | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| 2 | M | 4 | 1 | 0 | F | 1 | B | A | 2 | 0 |
|---|---|---|---|---|---|---|---|---|---|---|
- New EC Cert No 2797-CPR-589725

Intumescent kit J-STRONGBOLT-SL-IK suitable for 30 and 60 minute timber fire doors are available to order as a separate item



Finish:

- SS - Satin Stainless Steel
- PB - Polished Brass finish

StrongBOLT


220V

Oval profile cylinder Sashlock



ASSA ABLOY

Technical Design:

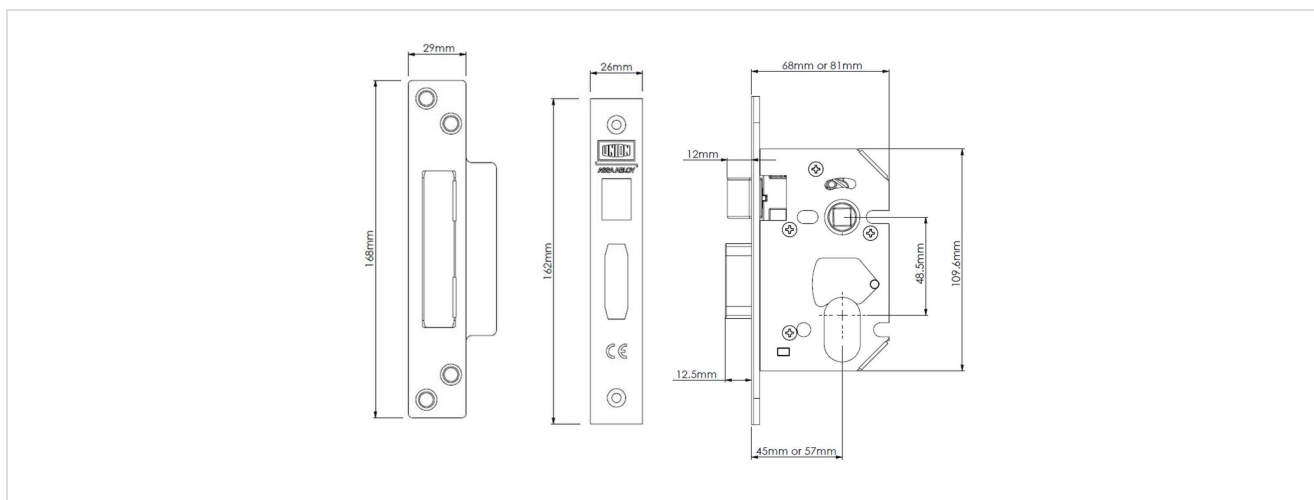

Variants:

Code	Description
JL22OVS-SS-2.5	S.BOLT OVAL PROF. CYL MORT. S.LOCK, SS, 2.5" CASE ONLY
JL22OVS-SS-3.0	S.BOLT OVAL PROF. CYL MORT. S.LOCK, SS, 3" CASE ONLY
JL22OVS-PB-2.5	S.BOLT OVAL PROF. CYL MORT. S.LOCK, PB, 2.5" CASE ONLY
JL22OVS-PB-3.0	S.BOLT OVAL PROF. CYL MORT. S.LOCK, PB, 3" CASE ONLY