


Package 1E

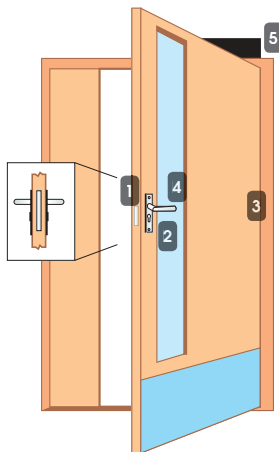

Standard door

Read in, free egress - complies with EN179

1. EL560 solenoid lock
2. CY326 single cylinder - DIN Europrofile
3. EA280 concealed door loop
4. 60-0319-SSS handle set (3-19/042 PZ+BL-SSS alternative)
5. DC240 door closer (optional)

Wood or metal door applications with handle operation, inside handle always operates and the outside handle is controlled and activated on signal from access control system. Key override at all times from outside.

Technical Specification:

Operating voltage: 12V DC to 24V DC stabilised (+15%-10%).

Current draw: 12V DC 350mA max 24V DC 250mA max.

Backsets available: Standard 65 mm, 55 mm, 60 mm, 80 mm, 100 mm.

Monitoring: RQE on inside handle, bolt position, door position, cylinder operation.

Standards:

EN179 when used with correct furniture

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

