


ePED® escape door terminal in switch design, 24 V DC, surface- mounted for time delay and illuminated pictogram 1386Z12B

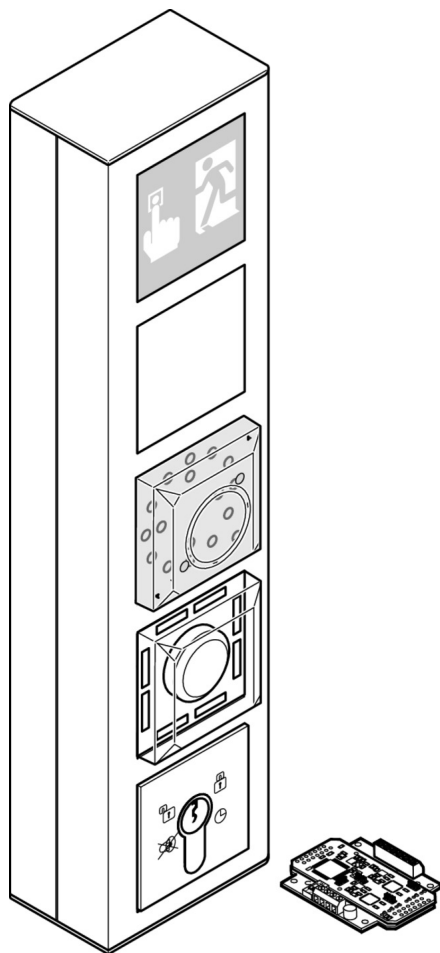

Product description

For use with time delay, with 4-wire bus cabling in Hi-O technology.

With emergency open module for the control and monitoring of electrical locking elements for escape routes.

The time delay is tested according to the requirements of DIN EN 13637:2015 (electrically controlled exit systems for use on escape routes) as per EN 61508 Safety Integrity Level 2 (SIL2).

Time delay applications are subject to local Building Regulations. Additional permissions may be required.

For surface mounting with manufacturer-specific covers and housing.

Consists of: illuminated pictogram; central cover; display release delay; emergency open module; key switch module

With ePED® interface for locks for installation in distribution boxes

Technical data

Current consumption 24 V DC	325 mA
Control function	Yes, Hi-O technology
Operating and display function	Yes, integrated
Connection	4-wire bus
Time delay	Yes
Illuminated pictogram	Yes
Display of down counter	Yes
Emergency button	Yes, latching
Control element	Key switch with Euro profile cylinder; cam position 8 x 45°; 30.5 mm long
Initial configuration	With ePED® service interface and software for MS Windows
Required power supply	24 V (±15 %) DC SELV
Operating temperature range	-10 °C – +55 °C
Area of application	For indoor use
Class of protection	IP30 (wenn vollständig montiert)
Installation	Surface fitting
Dimension	5 gang housing
Sabotage switch	Yes
Inputs	2
Outputs	1 x 30 V / 1 A switchover contact
Amount of bus addresses	4
Key switch on opposite side to direction of escape	Yes (without display)
Escape door terminal with bi-directional escape route	Yes
Certified in compliance with	EltVTR; DIN EN 13637:2015

Variants that can be ordered

Order number	Description
1386Z12B7--0450	Gira profile 55 - pure white; incl. 1386S00UP
1386Z12B7--3550	Gira profile 55 - aluminum finish; incl. 1386S00UP

Accessories/Individual parts

Order number	Product
1386D00-HW--F90	Illuminated information pictogram module for escape routes illuminates
1386D00-Coun-00	ePED® release delay display Standard for 55 mm modules

ePED® escape door terminal in switch design, 24 V DC, surface- mounted for time delay and illuminated pictogram

1386Z12B



1386D00---00	ePED® EMERGENCY OPEN module Standard for 55 mm modules
1385EG5-7--0400	Housing model 1385EG5 Gira - glossy pure white
1385EG5-7--3500	Housing model 1385EG5 Gira - aluminum colour
1386S00UP----00	ePED® interface for locks for installation for installation in distribution box